

NIMCO LED mirrors EU


EVERYTHING IMPORTANT ABOUT OUR LED MIRRORS		CONSTRUCTION ELEMENTS OF LED MIRRORS	
	5	LED MIRROR CONTROL	
NOVELTY	8	MODEL 28000R	black
ED MIRRORS WITH ACRYLIC BACKLIGHT	12	MODEL 27000R	
	14	MODEL 41000	black
	18	MODEL 42000	black
	22	MODEL 26000R	
	24	MODEL 23000	
	30	MODEL 12000	
	34	MODEL 24000R	
	36	MODEL 16000R	
	38	MODEL 8000	
	42	MODEL 22000	
	46	MODEL 18000	
	48	MODEL 17000	
	52	MODEL 11000	
	56	MODEL 19000	
	58	MODEL 14000 / 15000	
	60	MODEL 25000	
	62	MODEL 20000 / 21000	
ED MIRRORS WITH FRAME	66	MODEL 13000	
	72	MODEL 13000	black
.ED MIRRORS STANDARD	78	MODEL 9000	
	80	MODEL 1000	
	81	MODEL 2000	

LED COSMETIC MIRRORS

82 **MODEL 20165 / 20265 / 20465**


Construction elements of LED mirrors

Acrylic glass - Aluminum frame - Protective layer, glass 5mm - Aluminum power supply cover - Built-in LED diods

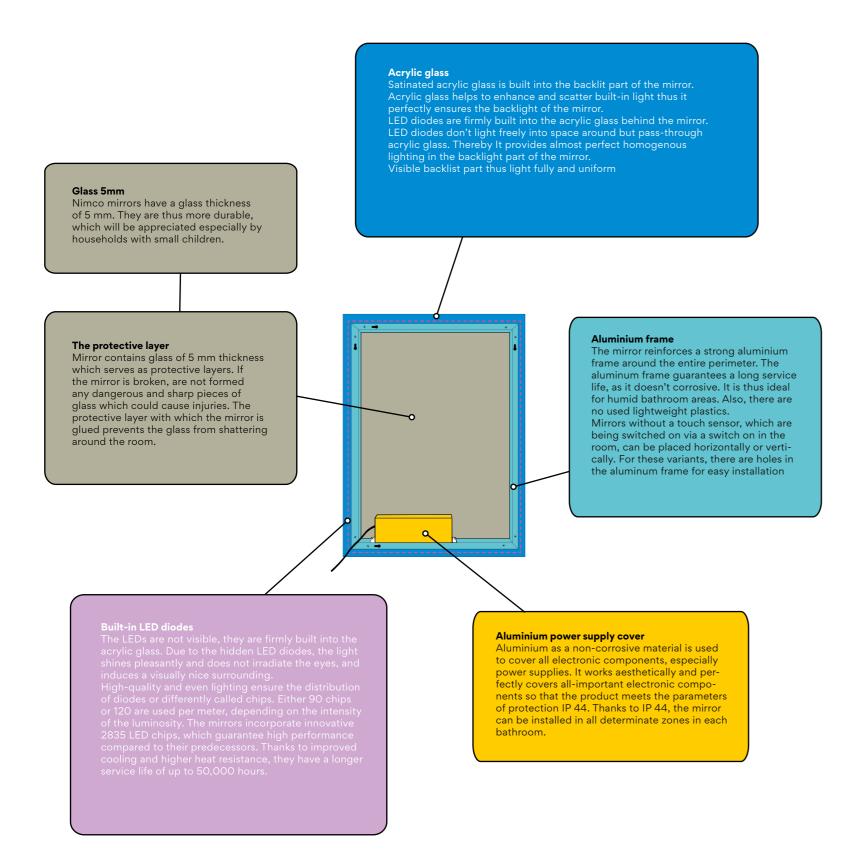

LED Mirror control

Turning off or on of the mirror
An important aspect which effect of choosing of the LED mirror is a way of turning on of the mirror lights. There is possible to choose from mirrors without a touch sensor or with it.

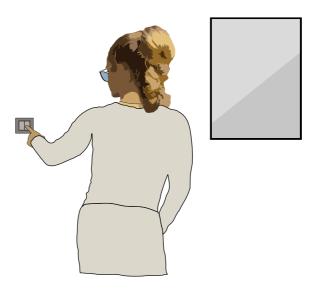


Mirrors without touch sensor:

Mirrors without touch sensors are connected as any other lights in the bathroom to the switch in the wall. This is therefore a classic rocker switch. In this case, will mirror light up with other lights in the bathroom. There is also the possibility to split lighting using a dual rocker switch.

Advantages: By entering your bathroom you can easily light up your mirror with other lights in the room. There is not required another turning on of the mirror.

Disadvantages: There is no possibility of setting color temperature 2700 - 6000 K. It is not suitable for users who request lighting of the mirror just at the moment when they use it.

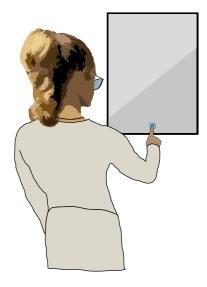


Mirrors with touch sensor:

Mirrors with touch sensor turn on by its sensor located directly on the mirror glass. It turns on with a touch of a finger. One short touch and the mirror is on or off. By holding a finger on the touch sensor longer you adjust the color temperature from warm white 2700K to colder white 6000 K. The mirror has its memory so it gets to remember your last settings. In case of power failure, the mirror has to be adjusted again.

Advantages: Possibility of setting color temperature. Turing on of mirror only during of using it. It is perfect for new technology lovers.

Disadvantages: It is controlled by the touch sensor on the mirror compared to the switch which is more comfortable because it is usually located by an entrance to the room. Less suitable for users who want to use the mirror also like additional light in the bathroom or as a decorative, ambient lighting.

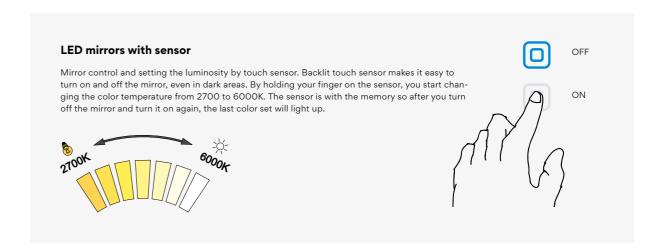



Novelty

We have prepared a new round mirror model for you:

Round mirrors with a narrow illuminated strip around the entire perimeter. It looks modern and very elegant. Mirrors are suitable for modern and industrial style bathrooms.

Model 28000 round mirrors with a diameter of 60 and 80 cm with a black frame around the perimeter.










LED mirror dia. 600

Output 26 W, chromaticity temperature 6000K. Black matt.

Novelty

ZPC 28000R-90






LED mirror dia. 800

Output 28 W, chromaticity temperature 6000K. Black matt.

Novelty

ZPC 28002R-90






LED mirror dia. 600With touch sensor. Output 26 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

Novelty


ZPC 28000RV-90





LED mirror dia. 800With touch sensor. Output 28 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 28002RV-90



MODEL 28000R



LED mirrors with acrylic backlight

NIMCO LED backlit mirrors are characterized by the improved luminosity thanks to the satinated acrylic glass which is placed under the backlit part of the mirror. Acrylic glass helps intensify and diffuse the light and together with the built-in innovative LED chips 2835 it provides almost perfect homogeneous lighting. The first models with this innovative concept started to be developed in 2016 and they were introduced to Czech market a year later. Modern mirror designs offer models with rounded edges or sharp edges or the round variant. Each model is stated in variable sizes.

Innovative 2835 chips guarantee better power in comparison to their forerunners and thanks to the higher thermic resistance and improved cooling they ensure long lifespan which reaches up to 50.000 hours. Chips placement is different for each model either 90 chips / meter or 120 chips / meter which ensures high-quality steady lighting.

Construction made of aluminium frame prevents any corrosion and it is ideal to humid bathrooms ensuring long lifespan. Aluminium as non-corrosive material is also used as material for covering all electronic elements mainly the power supply.

The mirror is 5 mm thick which makes it durable. This safety element is appreciated mainly by the families with kids.

Mirrors with the protection IP 44 are suitable even to humid rooms like bathrooms. IP 44 provides protection against splashing water. However, even with this protection the mirror cannot be placed everywhere in the bathroom. We recommend following the instructions and placing it to the suitable zones.

It is possible to choose among the mirrors with touch sensor with setting the color temperature and with the memory or mirrors without the sensor whereas it is connected to electricity and controlled by the swich of the lights.

Backlit touch sensor makes it easy to turn the mirror on and off even in dark places. Holding your finger on the sensor allows regular transition between colors. The setting is possible among 2700 K - 6000 K. The sensor is with a memory, so after turning off and on again the last set color will light.

Mirrors without the touch sensor can be attached horizontally or vertically and therefore it fits into your interior according to your idea. The installation can be easily done in accordance with the instructions.










LED mirror dia. 700Output 36 W, chromaticity temperature 6000K. Aluminium frame.

ZP 27001R






LED mirror dia. 700

With touch sensor. Output 36 W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 27001RV





DBOB.

ZPC 41006-90, LED mirror 1200x650

ACCESSORIE

MA 29031K-T-26, Soap dispenser

MA 29058K-26, Toothbrush holde


MA 29059K-26, Soap dis

1A 29035-26, Towel holder 360 mr



Output 23 W, chromaticity temperature 4000K. Black matt.

ZPC 41003-90






LED mirror 1000x600

Output 27 W, chromaticity temperature 4000K. Black matt.

ZPC 41004-90






LED mirror 1200x650

Output 33 W, chromaticity temperature 4000K. Black matt.

ZPC 41006-90






LED mirror 800x600

With touch sensor. Output 23 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 41003V-90






LED mirror 1000x600

With touch sensor. Output 27 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 41004V-90






LED mirror 1200x650

With touch sensor. Output 33 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 41006V-90




16 MODEL 41000 17





Output 23 W, chromaticity temperature 4000K. Black matt.

ZPC 42003-90






LED mirror 1000x600

Output 27 W, chromaticity temperature 4000K. Black matt.

ZPC 42004-90






LED mirror 1200x650

Output 32 W, chromaticity temperature 4000K. Black matt.

ZPC 42006-90






LED mirror 800x600

With touch sensor. Output 23 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 42003V-90





LED mirror 1000x600

With touch sensor. Output 27 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 42004V-90






LED mirror 1200x650

With touch sensor. Output 32 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 42006V-90



20 MODEL 42000 21






LED mirror dia. 600

Output 26 W, chromaticity temperature 6000K. Aluminium frame.

ZP 26000R






LED mirror dia. 800

Output 28 W, chromaticity temperature 6000K. Aluminium frame.

ZP 26002R






LED mirror dia. 600

With touch sensor. Output 26 W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 26000RV






LED mirror dia. 800

With touch sensor. Output 28 W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 26002RV

23



MODEL 26000R



MIRROR:

ZP 23003, LED mirror 800 x 700

ZK 20265-26, Cosmetic LED mirror with touch sense

ACCESSORIES:

NK 30058K-26, Toothbrush holde

NK 30031K-T-26, Soap dispens


NK 30098-26, Towel holder 384 mm

K 30059K-26, Soap dish



LED mirror 500 x 700Output 7,5W, chromaticity temperature 6000K. Aluminium frame.


ZP 23001





LED mirror 600 x 800 Output 9W, chromaticity temperature 6000K. Aluminium frame.


ZP 23002





LED mirror 800 x 700Output 12W, chromaticity temperature 6000K. Aluminium frame.


ZP 23003





LED mirror 1400 x 700
Output 21W, chromaticity temperature 6000K. Aluminium frame.

ZP 23008






LED mirror 900 x 700

Output 13,5W, chromaticity temperature 6000K. Aluminium frame.

ZP 23019






LED mirror 1000 x 700

Output 15W, chromaticity temperature 6000K. Aluminium frame.

ZP 23004





LED mirror 1200 x 700

Output 18W, chromaticity temperature 6000K. Aluminium frame.


ZP 23006





With touch sensor. Output 7,5W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 23001V





LED mirror 600 x 800

With touch sensor. Output 9W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 23002V






LED mirror 800 x 700

With touch sensor. Output 12W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 23003V






LED mirror 1400 x 700

With touch sensor. Output 21W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 23008V






LED mirror 900 x 700

With touch sensor. Output 13,5W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 23019V






LED mirror 1000 x 700

With touch sensor. Output 15W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 23004V






LED mirror 1200 x 700

With touch sensor. Output 18W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 23006V




28 MODEL 23000 29





Output 24 W, chromaticity temperature 6000K . Aluminium frame.

ZP 12003






LED mirror 900 x 700

Output 26 W, chromaticity temperature 6000K. Aluminium frame.

ZP 12019






LED mirror 1000 x 700

Output 29 W, chromaticity temperature 6000K. Aluminium frame.

ZP 12004






LED mirror 800 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 24W. Aluminium frame.

ZP 12003V






LED mirror 900 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 26W. Aluminium frame.

ZP 12019V






LED mirror 1000 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 29W. Aluminium frame.

ZP 12004V







LED mirror 1200 x 700

Output 35 W, chromaticity temperature 6000K . Aluminium frame.

ZP 12006





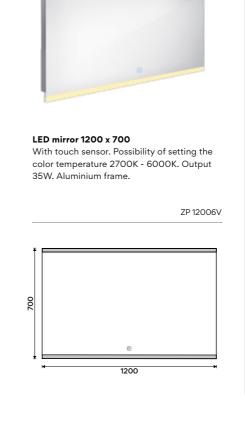

32 **MODEL 12000 MODEL 12000** 33






LED mirror dia. 600

Output 28W, chromaticity temperature 6000K. Aluminium frame.

ZP 24000R






LED mirror dia. 800

Output 29 W, chromaticity temperature 6000K. Aluminium frame.

ZP 24002R






LED mirror dia. 600

With touch sensor. Output 28W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 24000RV






LED mirror dia. 800

With touch sensor. Output 29 W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 24002RV

35




MODEL 24000R





LED mirror dia. 600Output 13 W, chromaticity temperature 6000K. Aluminium frame.

ZP 16000R






LED mirror dia. 600

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 13W. Aluminium frame.

ZP 16000RV








Output 6 W, chromaticity temperature 6000K. Aluminium frame.

ZP 8000






LED mirror 500 x 700

Output 8 W, chromaticity temperature 6000K. Aluminium frame.

ZP 8001






LED mirror 600 x 700

Output 9 W, chromaticity temperature 6000K. Aluminium frame.

ZP 8002






LED mirror 1200 x 600

Output 18 W, chromaticity temperature 6000K. Aluminium frame.

ZP 8006






LED mirror 800 x 600

Output 12 W, chromaticity temperature 6000K. Aluminium frame.

ZP 8003






LED mirror 900 x 600

Output 13 W, chromaticity temperature 6000K. Aluminium frame.

ZP 8019






LED mirror 1000 x 600

Output 15 W, chromaticity temperature 6000K. Aluminium frame.

ZP 8004






LED mirror 600 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 9W. Aluminium frame.

ZP 8002V





IRROR:

ZP 22002, LED mirror 600 x 800

ACCESSORIES:

Ki-14091B-40-90, Shelf 400 mm

Ki-14031K-T-90, Soap dispenser


Ki-14059K-90, Soap dish

Ki-14096-90, Swivel towel holder 375 mm



Output 10,5W, chromaticity temperature 6000K. Aluminium frame.

ZP 22002






LED mirror 800 x 700

Output 16,5W, chromaticity temperature 6000K. Aluminium frame.

ZP 22003






LED mirror 900 x 700

Output 19,5W, chromaticity temperature 6000K. Aluminium frame.

ZP 22019






LED mirror 600 x 800

With touch sensor. Output 10,5W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 22002V






LED mirror 800 x 700

With touch sensor. Output 16,5W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 22003V






LED mirror 900 x 700

With touch sensor. Output 19,5W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 22019V






LED mirror 1000 x 700

Output 22,5W, chromaticity temperature 6000K. Aluminium frame.

ZP 22004






LED mirror 1200 x 700

Output 28,5W, chromaticity temperature 6000K. Aluminium frame.

ZP 22006






LED mirror 1400 x 700

Output 34,5W, chromaticity temperature 6000K. Aluminium frame.

ZP 22008






LED mirror 1000 x 700

With touch sensor. Output 22,5W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 22004V






LED mirror 1200 x 700

With touch sensor. Output 28,5W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 22006V






LED mirror 1400 x 700

With touch sensor. Output 34,5W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 22008V

45




44 MODEL 22000





Output 15 W, chromaticity temperature 6000K. Aluminium frame.

ZP 18001






LED mirror 600 x 800

Output 15 W, chromaticity temperature 6000K. Aluminium frame.

ZP 18002






LED mirror 600 x 800

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 15 W. Aluminium frame.

ZP 18002V



MODEL 18000





Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 17001






LED mirror 600 x 800

Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 17002






LED mirror 800 x 700

Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 17003






LED mirror 500 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 21W. Aluminium frame.

ZP 17001V






LED mirror 600 x 800

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 21W. Aluminium frame.

ZP 17002V






LED mirror 800 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 21W. Aluminium frame.

ZP 17003V






LED mirror 900 x 700

Output 21W, chromaticity temperature 6000K. Aluminium frame.

ZP 17019






LED mirror 1000 x 700

Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 17004






LED mirror 900 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 21W. Aluminium frame.

ZP 17019V






LED mirror 1000 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 21W. Aluminium frame.

ZP 17004V




50 MODEL 17000 51





Output 18 W, chromaticity temperature 6000K. Aluminium frame.

ZP 11000






LED mirror 500 x 700

Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 11001






LED mirror 600 x 800

Output 24 W, chromaticity temperature 6000K. Aluminium frame.

ZP 11002








LED mirror 500 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 21W. Aluminium frame.

ZP 11001V






LED mirror 600 x 800

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 24W. Aluminium frame.

ZP 11002V






LED mirror 800 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 21W. Aluminium frame.

ZP 11003V






LED mirror 800 x 700

Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 11003






LED mirror 900 x 700

Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 11019






LED mirror 1000 x 700

Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 11004




54 MODEL 11000 55





Output 35W, chromaticity temperature 6000K. Aluminium frame.

ZP 19066







LED mirror 600 x 600

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 35W. Aluminium frame.

ZP 19066V




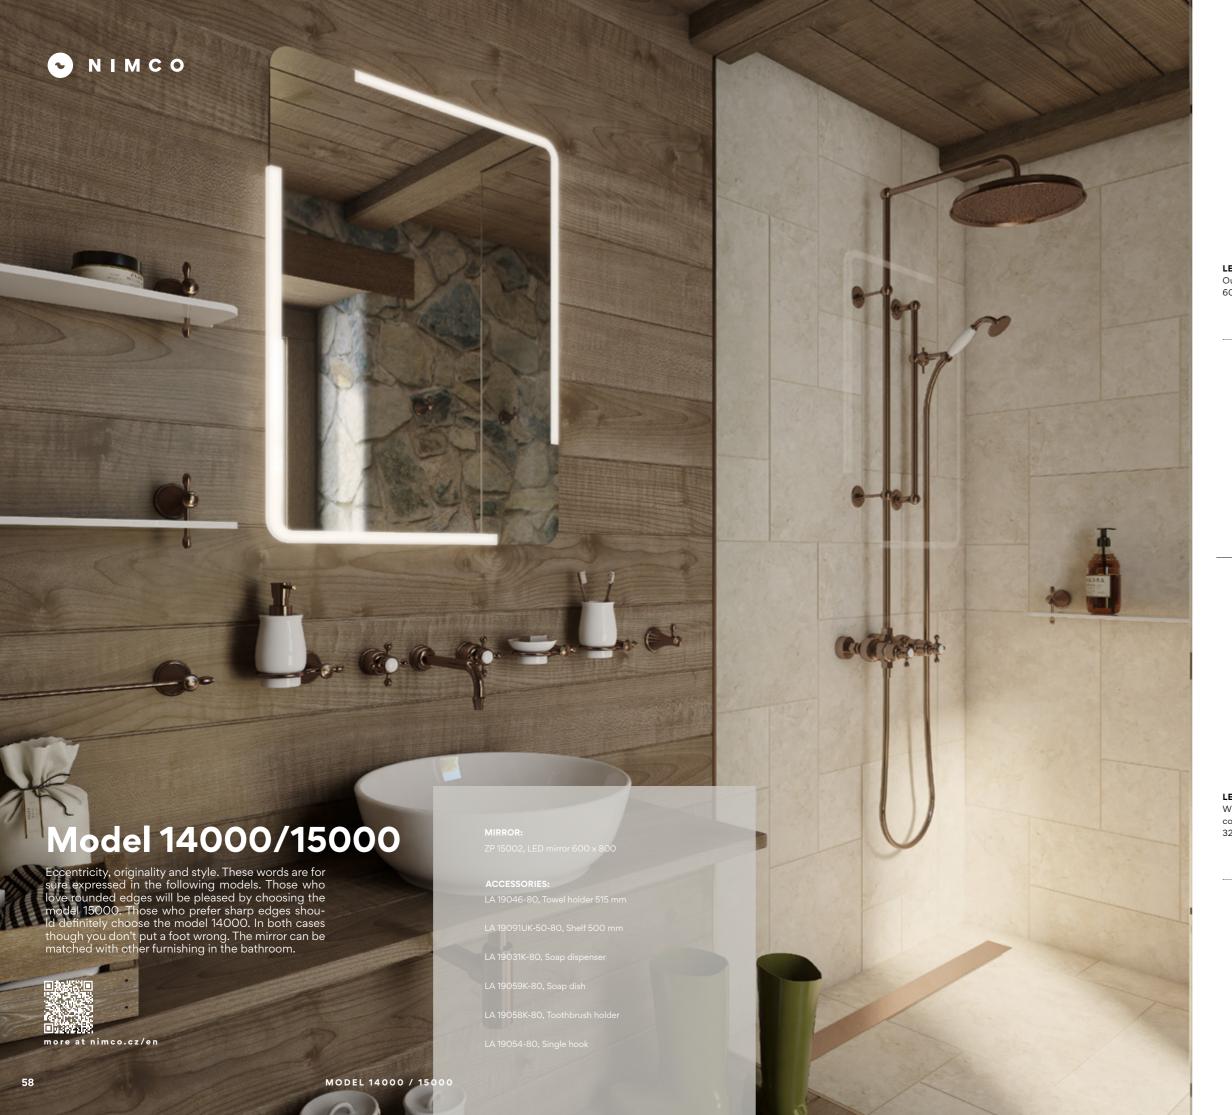



Output 32 W, chromaticity temperature 6000K. Aluminium frame.

ZP 14002






LED mirror 600 x 800

Output 32 W, chromaticity temperature 6000K. Aluminium frame.

ZP 15002






LED mirror 600 x 800

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 32W. Aluminium frame.

ZP 14002V






LED mirror 600 x 800

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 32W. Aluminium frame.

ZP 15002V




MODEL 14000 / 15000





Output 11W, chromaticity temperature 6000K. Aluminium frame.

ZP 25002






LED mirror 600 x 800

With touch sensor. Output 11W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 25002V








LED mirror 600 x 800

Output 7 W, chromaticity temperature 6000K. Aluminium frame.

ZP 20002





LED mirror 600 x 800

Output 10 W, chromaticity temperature 6000K. Aluminium frame.

ZP 2100





LED mirrors with frame

The mirror which fits into each bathroom thanks to its austerity and sophistication. Models 13000 have visible aluminium frame which is offered in brushed surface finish or black matt. LED diodes are built-in to the frame and placed around the whole perimeter and covered by 8mm frame. This favorite model is available in standard sizes.

Innovative 2835 chips guarantee better power in comparison to their forerunners and thanks to the higher thermic resistance and improved cooling they ensure long lifespan which reaches up to 50.000 hours. Chips placement is different for each model either 90 chips / meter or 120 chips / meter which ensures high-quality steady lighting.

Construction made of aluminium frame prevents any corrosion and it is ideal to humid bathrooms ensuring long lifespan. Aluminium as non-corrosive material is also used as material for covering all electronic elements mainly the power supply.

The mirror is 5 mm thick which makes it durable. This safety element is appreciated mainly by the families with kids.

Mirrors with the protection IP 44 are suitable even to humid rooms like bathrooms. IP 44 provides protection against splashing water. However, even with this protection the mirror cannot be placed everywhere in the bathroom. We recommend following the instructions and placing it to the suitable zones.

It is possible to choose among the mirrors with touch sensor with setting the color temperature and with the memory or mirrors without the sensor whereas it is connected to electricity and controlled by the swich of the lights.

Backlit touch sensor makes it easy to turn the mirror on and off even in dark places. Holding your finger on the sensor allows regular transition between colors. The setting is possible among 2700 K - 6000 K. The sensor is with a memory, so after turning off and on again the last set color will light

Mirrors without the touch sensor can be attached horizontally or vertically and therefore it fits into your interior according to your idea. The installation can be easily done in accordance with the instructions.










Color temperature – day light 4000-4500K. Output 29 W. Aluminium frame.

ZP 13000






LED mirror 500 x 700

Color temperature – day light 4000-4500K. Output 35 W. Aluminium frame.

ZP 13001





LED mirror 600 x 800

Color temperature – day light 4000-4500K. Output 41 W. Aluminium frame.

ZP 13002






LED mirror 900 x 700

Color temperature – day light 4000-4500K. Output 47 W. Aluminium frame.

ZP 13019






LED mirror 1000 x 700

Color temperature – day light 4000-4500K. Output 49 W. Aluminium frame.

ZP 13004






LED mirror 1200 x 700

Color temperature – day light 4000-4500K. Output 55 W. Aluminium frame.

ZP 13006





LED mirror 600x600

Output 30 W, chromaticity temperature 4000-4500K. Aluminium frame.

ZP 13066






LED mirror 700x700

Output 32 W, chromaticity temperature 4000-4500K. Aluminium frame.

ZP 13077






LED mirror 800 x 700

Color temperature – day light 4000-4500K. Output 44 W. Aluminium frame.

ZP 13003





LED mirror 1400 x 700

Output 60 W, chromaticity temperature 4000-4500 K. Aluminium frame.


ZP 13008





With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 35W. Aluminium frame.

ZP 13001V






LED mirror 600 x 800

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 41W. Aluminium frame.

ZP 13002V







LED mirror 600x600

With touch sensor. Output 30 W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 13066V




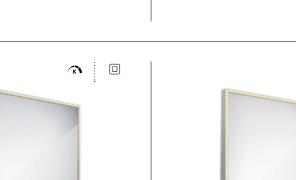

LED mirror 700x700

With touch sensor. Output 32 W. Possibility of setting the color temperature 2700K - 6000K. Aluminium frame.

ZP 13077V






LED mirror 800 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 44W. Aluminium frame.

ZP13003V






LED mirror 900 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 47W. Aluminium frame.

ZP 13019V






LED mirror 1000 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 49W. Aluminium frame.

ZP 13004V






LED mirror 1200 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 55W. Aluminium frame.

ZP 13006V






LED mirror 1400 x 700

With touch sensor. Possibility of setting the color temperature 2700K - 6000K. Output 60W. Aluminium frame.

ZP 13008V



70 MODEL 13000 71



MIPPOP.

ZPC 13003V-90, LED mirror 800 x 700

ACCESSORIES:

MAC 29031H-T-90, Soap dispenser


MAC 29058H-90, Toothbrush holde

C 29098-90, Towel holder 370 mm



Output 41W, chromaticity temperature 4000-4500K. Black matt.

ZPC 13002-90





LED mirror 600x600

Output 30 W, chromaticity temperature 4000-4500K. Black matt.

ZPC 13066-90






LED mirror 700x700

Output 32 W, chromaticity temperature 4000-4500K. Black matt.

ZPC 13077-90






LED mirror 600 x 800

With touch sensor. Output 41W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 13002V-90






LED mirror 600x600

With touch sensor. Output 30 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 13066V-90





LED mirror 700x700

With touch sensor. Output 32 W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 13077V-90

75






LED mirror 800 x 700

Output 44W, chromaticity temperature 4000-4500K. Black matt.

ZPC 13003-90






LED mirror 1200 x 700

Output 55W, chromaticity temperature 4000-4500K. Black matt.

ZPC 13006-90






LED mirror 800 x 700

With touch sensor. Output 44W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 13003V-90






LED mirror 1200 x 700

With touch sensor. Output 55W. Possibility of setting the color temperature 2700K - 6000K. Black matt.

ZPC 13006V-90



74 MODEL 13000 BLACK



LED mirrors standard

NIMCO mirrors of standard sizes for everybody who likes to stick to classic style. With the following models you bet on certainty in the form of elegant mirrors suitable to each bathroom. Delicate and thin LED strip placed on two sides of the mirror or directly in the mirror brings pleasant lighting into the room. The models are without the sensor, connected directly to electric power distribution. Turning on and off is performed through the main switch of the light in the room.

Innovative 2835 chips guarantee better power in comparison to their forerunners and thanks to the higher thermic resistance and improved cooling they ensure long lifespan which reaches up to 50.000 hours. Chips placement is different for each model either 90 chips / meter or 120 chips / meter which ensures high-quality steady lighting.

Construction made of aluminium frame prevents any corrosion and it is ideal to humid bathrooms ensuring long lifespan. Aluminium as non-corrosive material is also used as material for covering all electronic elements mainly the power supply.

The mirror is 5 mm thick which makes it durable. This safety element is appreciated mainly by the families with kids.

Mirrors with the protection IP 44 are suitable even to humid rooms like bathrooms. IP 44 provides protection against splashing water. However, even with this protection the mirror cannot be placed everywhere in the bathroom. We recommend following the instructions and placing it to the suitable zones.










Output 18 W, chromaticity temperature 6000K. Aluminium frame.

ZP 9000






LED mirror 500 x 700

Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 9001






LED mirror 600 x 800

Output 24 W, chromaticity temperature 6000K. Aluminium frame.

ZP 9002






LED mirror 800 x 700

Output 21 W, chromaticity temperature 6000K. Aluminium frame.

ZP 9003






LED mirror 900 x 700

Output 21W, chromaticity temperature 6000K. Aluminium frame.

21 301





LED mirror 1000 x 700

Output 21W, chromaticity temperature 6000K. Aluminium frame.

ZP 9004

79




MODEL 19000



Output 6W, chromaticity temperature 6000-6500K. Aluminium frame.

ZP 1001






LED mirror 600 x 800

Output 7W, chromaticity temperature 6000-6500K. Aluminium frame.

ZP1002






LED mirror 500 x 700

Output 6 W, chromaticity temperature 6000-6500K. Aluminium frame.

ZP 2001






LED mirror 600 x 800

Output 7 W, chromaticity temperature 6000-6500K. Aluminium frame.

ZP 2002






LED mirror 800 x 600

Output 10 W, chromaticity temperature 6000-6500K. Aluminium frame.

ZP 2003

81






LED mirror 1000 x 600

Output 13 W, chromaticity temperature 6000-6500K. Aluminium frame.

ZP 2004



80 MODEL 1000/2000






Cosmetic LED mirror with touch

With backlit sensor, 6500 K, output 8 W, 5x magnifying. Chrome.

ZK 20165-26






Cosmetic LED mirror with touch

With backlit sensor, 6500 K, output 8 W, 5x magnifying. Black matt.

> ZK 20265-90 ZK 20265-26

Cosmetic LED mirror with touch







Cosmetic LED mirror with touch

With backlit sensor, 6500 K, output 8 With backlit sensor, 6500 K, output 8 W, 5x magnifying. Chrome. W, 5x magnifying. Chrome.

ZK 20465-26



Backlit touch sensor

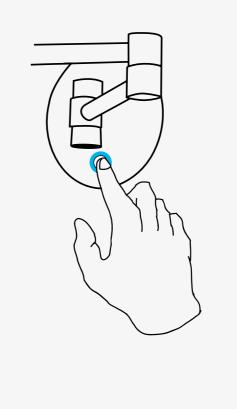




Cosmetic LED mirror with touch

With backlit sensor, 2700 and 6500 K, output 8 W, 5x magnifying. Chrome.


ZK 20265P-26





output 8 W, 5x magnifying. Chrome.

ZK 20465P-26



LED cosmetic mirrors

Your skin care and perfect make-up will be much more comfortable with LED cosmetic mirror NIMCO. Its 5x magnification will help you reach the perfection. Cosmetic mirrors NIMCO will please you by their design and they will definitely fit into every bathroom. Some models also offer switching between the cool light and warm light which is ensured by backlit touch




more at nimco.cz/en



Cable connector, IP 44

ZP 01



LED MIRRORS



Acrylic glass

Acrylic glass helps intensify and diffuse the light which causes almost perfect homogenous lighting. This innovative concept leads the light through finely but precisely crafted transparent acrylic frame on the sides of the mirror.



Drilling

The products are assembled by drilling



High-quality of surface finish mirrors

NIMCO mirrors are not only stylish pieces but also they offer high-quality surface finish and craftman-



Aluminium frame

The mirror consists of mirror glass and quality aluminium frame which is elegantly worked.



Aluminium cover of power supply

Lifespan of LED chips

Aluminium as non-corrosive material is also used as the material for covering all electric components especially power source.

LED chips have a lifespan of 50.000 hours. Innova-

tive LED chips 2835 have higher thermic resistance

and improved cooling which significantly extends



5mm glass

The NIMCO mirror glass is 5 mm which makes them more resistant. Especially households with kids appreciate this safety feature.



LED diodes

The chips are placed 90 chips / meter or 120 chips / meter which ensures high-quality and uniform



Switch

6000 K

their service life.

The mirror is connected to electricity. Turning on and off is performed performed through the main switch of light in the room.



LED chips 2835

IP 44 protection

Compared to their forerunners, innovative chips 2835 guarantee high performance and long lifespan, which is up to 50.000 hours.



Range of tempeature lighting 2700 -

Most models without the switch offer the color temperature of 6000 K, the so called "cool white" which is the bright midday light suitable to modern bathrooms. The range of mirrors offers also the one with warm light - 2700 K. If you do not like to think it over but you prefer to have a choice, then the models with touch sensor are optimal solution allowing you to change color temperature from 27000 to 6000 K.



Mirrors with the protection IP 44 are suitable even to humid rooms like bathrooms. IP 44 provides protection against splashing water. However, even with this protection the mirror cannot be placed anywhere in the bathroom. We recommend following the instructions and placing it to the suitable zones.



Vertical and horizontal mirror position

Mirrors without the touch sensor can be placed vertically and horizontally so they could easily fit into your interior according to your ideas. The installation can be done easily according to the instructions.



Backlit touch sensor

Backlit touch sensor makes it easy to turn on and off the mirror, even in dark areas. By holding your finger on the sensor, you start changing the color temperature from 2700 to 6000 K. The sensor is with the memory so after you turn off the mirror and turn it on again, the last color set will light up.

BATHROOM ACCESSORIES

H59

H63

Brass



High-quality surface finish



Stainless steel



Easy cleaning

Assembly system allowing taking out the product easily. This simplifies cleaning the product and its surrounding



Zinc alloy

Zinc allov resistant to corrosion



Sticking

Drilling

The products are assembled by stic-



PLEXIGLAS ®@ EVONIK

Shelves are made of special snow-whi-

te translucent plexiglass with velvety matt surface finish on both sides.

EXTRAWHITE

Extra clear glass. Compared to ordinary glass, this glass is completely clear, thus colorless. Its absolute whiteness is highlighted by its matt surface on both sides. The glass is 8 mm thick.



The products are assembled by drilling



5l

Protection against fingerprints

Special layer which does not leave fingerprints after the touch.

5 I volume suitable to family bathro-

Abs plastic

Harmless polymer durable resistant to mechanical damage



ABS

Artificial stone

Shelves made of artificial stone



Pedal dust bin

Volume 5 l

oms and hotels.

Dust bin controlled by the pedal. No need for touch of the hands.

Dust bin with slow and soft closing sys-



Polyresin

Type of synthetic resin



Bamboo

Steel

Resistant and solid grass suitable for production of various objects

Classic steel is used for products with

surface finish powder varnish.



Aluminium

Soft closing

ALU







ROMVEL spol. s r. o.

Dr. Milady Horákové 561/86a Liberec 7, 460 07 Česká republika, Czech Republic

T: (+420) 485 105 671 T: (+420) 485 107 441 F: (+420) 485 105 674 E: nimco@nimco.cz

ORDERS

E-MAIL: objednavky@nimco.cz FAX: +0420 485 105 674 TEL:+0420 485 107 441 M: +0420 773 669 955


SALES REPRESENTATIVES

Bohemia

Jiří Rippl E-MAIL: jiri.rippl@nimco.cz TEL: (+420) 724 150 704

Moravia, Slovakia

Radek Machala E-MAIL: radek.machala@nimco.cz TEL: (+420) 777 266 877



www.nimco.cz



The listed prices are recommended sales prices without VAT.

LED mirrors EU